

Notice to Mariners

Rampion Offshore Wind Farm

Date of Issue: 07/08/2018
Notice Expires: 30/10/2018

Dear Owners, Ships Agents, Masters, Pilots and Fishermen,

Re: Rampion Offshore Wind Farm - EON-NTM-00118-Installation of New Export Cable

The Atalanti and associated Vessels will start with preparatory operations for the cable installation on the 15/08/18 and will last approximately 4 weeks.

Installation of the new export will commence from around the 15/08/18 and will last approximately 4 weeks.



Vessel: CLB Atalanti
Draught: 4.2m
Length x Breadth: 96.99m x 31.46m
Gross Tonnage: 5974
Speed recorded (Max / Average): 9.2/ 8.4knots
Call Sign: 5BYY2
IMO: 8661616
MMSI: 212279000
Flag: Cyprus (CY)

The vessel Artemis will assist the Atalanti during installation of the cable.



Vessel: CLB Artemis
Draught: 5.6m
Length x Breadth: 67.83m x 15.6m
Gross Tonnage: 1989
Speed recorded (Max / Average): 9.2/ 8.4knots
Call Sign: 5BVJ3
IMO: 8321591
MMSI: 209618000
Flag: Cyprus (CY)

Please be advised that the vessel MPSV Astrea will be conducting Trenching burial of the cable once laid by the cable lay vessel CLB Atlanti. The trenching of the cable is due to take 6 weeks and will be operating from KP2.0 to the offshore substation.



Vessel: CLB Astrea
Draught: 4.9m
Length x Breadth: 71.3m x 15.6m
Gross Tonnage: 3200
Speed recorded (Max / Average): 11.1/ 9.8knots
Call Sign: SYBE
IMO: 8520771
MMSI: 240691000
Flag: GREECE (GR)

Notice to Mariners

Rampion Offshore Wind Farm

Date of Issue: 07/08/2018
Notice Expires: 30/10/2018

The C59 (jack-up barge) and Capall Mara will be assisting inshore export cable landing operations.



C59 Emotion

Draught: 1.24 m
Length x Breadth: 18.3 m X 18.3 m
Gross Tonnage: 100
Speed recorded (Max / Average): 7.7/6.4 knots
Call Sign: TBC
MMSI: TBC
Flag: (GB)

Once pull-in operations are completed the Capall Mara will backfill the trench from KP0.35 to KP 2.0. This operation should take approx. 5 days weather permitting



Capall Mara

Draught: 2.4 m
Length x Breadth: 39.6 m X 14 m
Gross Tonnage: 992
Speed recorded (Max / Average): 7.7/6.4 knots
Call Sign: MBSF3
MMSI: 232010652
Flag: (GB)

Mariners are advised to give the vessels a wide berth as the vessels will be restricted in manoeuvrability whilst carrying out operations.

All vessels are requested to remain a minimum safe distance of 500m from the vessels during operations and whilst they are on location.

Vessels will be monitoring channel 16 VHF and the project P1 channel

Please note there will be an additional 10 assorted Ribs of varying sizes to assist with the inshore float in of the cable from KP 2.2 to KP 0.2. The inshore pull-in is due to take 24hrs weather permitting

There will be 4 x temp spud pontoons in position during the float in of the cable.
See below illustration

Notice to Mariners

Rampion Offshore Wind Farm

Date of Issue: 07/08/2018
Notice Expires: 30/10/2018


Latitude	Longitude	KP
50° 49.0347' N	0° 20.1759' W	0.000
50° 48.8174' N	0° 20.0679' W	0.422
50° 48.499' N	0° 19.9179' W	1.038
50° 47.5073' N	0° 19.2754' W	3.026
50° 46.9104' N	0° 19.0408' W	4.167
50° 46.8624' N	0° 19.028' W	4.257
50° 46.6346' N	0° 18.9954' W	4.681
50° 46.5865' N	0° 18.9951' W	4.770
50° 46.0698' N	0° 19.0621' W	5.732
50° 45.4367' N	0° 19.1944' W	6.916
50° 45.3316' N	0° 19.2183' W	7.113
50° 45.2744' N	0° 19.2241' W	7.219
50° 45.1798' N	0° 19.222' W	7.394
50° 45.0737' N	0° 19.1969' W	7.593
50° 44.4019' N	0° 18.9836' W	8.864
50° 44.2304' N	0° 18.939' W	9.186
50° 44.011' N	0° 18.8819' W	9.598
50° 43.7299' N	0° 18.7794' W	10.133
50° 43.441' N	0° 18.6499' W	10.690
50° 43.2979' N	0° 18.5716' W	10.971
50° 43.2454' N	0° 18.5349' W	11.078
50° 43.1797' N	0° 18.4776' W	11.217
50° 43.1319' N	0° 18.4271' W	11.324
50° 42.958' N	0° 18.2059' W	11.738
50° 42.7875' N	0° 17.9298' W	12.191
50° 42.3833' N	0° 17.1555' W	13.372
50° 42.2907' N	0° 16.9781' W	13.642
50° 41.9023' N	0° 16.2441' W	14.767
50° 41.796' N	0° 16.0069' W	15.109
50° 41.6474' N	0° 15.666' W	15.596
50° 41.6235' N	0° 15.6358' W	15.653
50° 41.5764' N	0° 15.5982' W	15.751

Notice to Mariners


Rampion Offshore Wind Farm

Date of Issue: 07/08/2018
 Notice Expires: 30/10/2018

RAMPTION OFFSHORE WIND FARM - CABLE 4 INSTALLATION

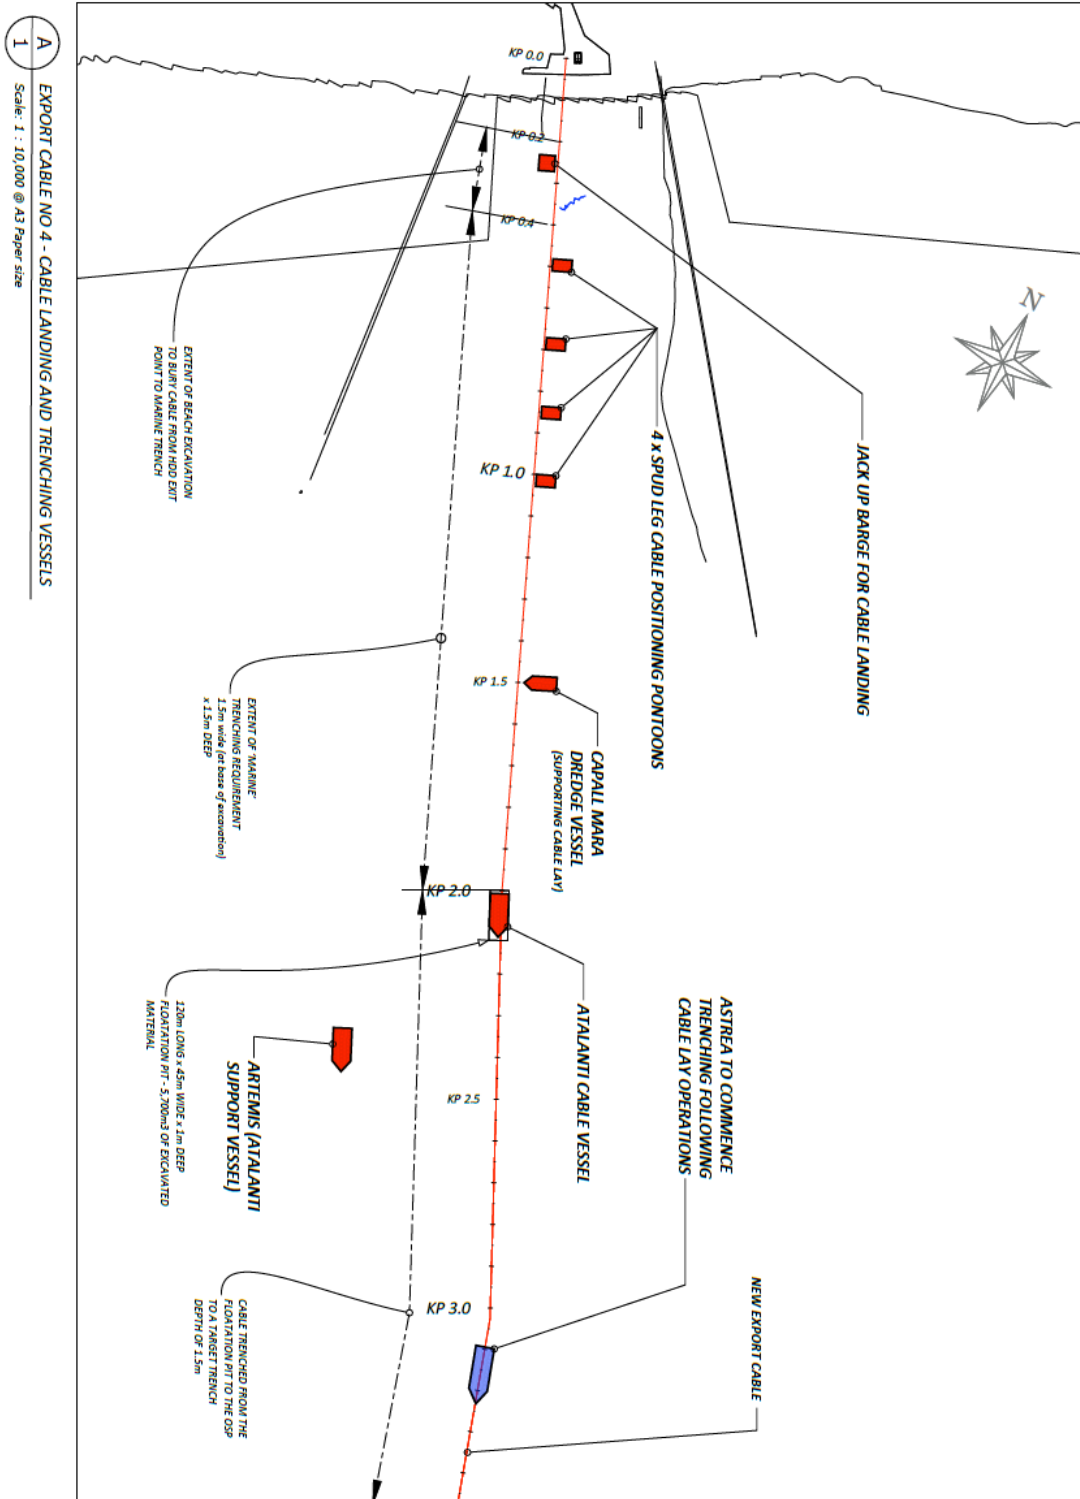

A
1
 EXPORT CABLE NO 4 - CABLE LANDING AND TRENCHING VESSELS
 Scale: 1 : 10,000 @ A3 Paper size

Page 1	DRAWING NAME: GD7-RAM-0005-Rev 02	PROJECT: RAMPTION OFFSHORE WIND FARM	DATE DRAWN: 06:08:18	CLIENT 
	DRAWING TITLE: EXCAVATION & FILL QUANTITIES - 06:08:18	DRAWN BY: Gary Duff		

Notice to Mariners

Rampion Offshore Wind Farm

Date of Issue: 07/08/2018
Notice Expires: 30/10/2018

Mark Brown

Offshore Site Manager
Tel: +44 (0) 7491 057 121
Email: mark.brown@eon.com

Gordon Bain

Lead Marine Coordinator
Tel: +44 (0) 7816 648 082
Email: leadmc@rampionoffshore.com.

Duty Marine Coordinator

Tel: +44 (0) 7557 942 945
Email: traffic@rampionoffshore.com

Alex Winrow-Giffin

Brown & May Fisheries Liaison
Tel: +44 (0) 7760 160 039
Email: alex@brownmay.com